

**HYDRAULIC IMPACT WRENCH EXTENSIONS**


- Impact wrench extensions provide isolation between the impact wrench and potential voltages
- Male end has a retainer pin for sockets. Both male and female ends are 1/2" drive are heat treated for impact operation.

CAT NO	DIMENSIONAL REFERENCE		LBS
	A	B	
10-198	15 3/16"	6"	5.0
10-199	27 3/16"	18"	5.0
10-200	39 3/16"	30"	6.0
10-201	51 3/16"	42"	5.5
10-167	75 3/16"	66"	9.0

**FLEXIBLE HEAD INSULATED SOCKET WRENCH**

- For hardware tightening operations
- The optional female ratchet handle is reversible
- Both ends female and male are 1/2" square drive

CAT NO	DESCRIPTION	LBS
10765	1 1/2" x 6' SOCKET WRENCH	5.5
10768	1 1/2" x 8' SOCKET WRENCH	8.0
SA50A	RATCHET HANDLE - FEMALE 1/2" DRIVE	2.0

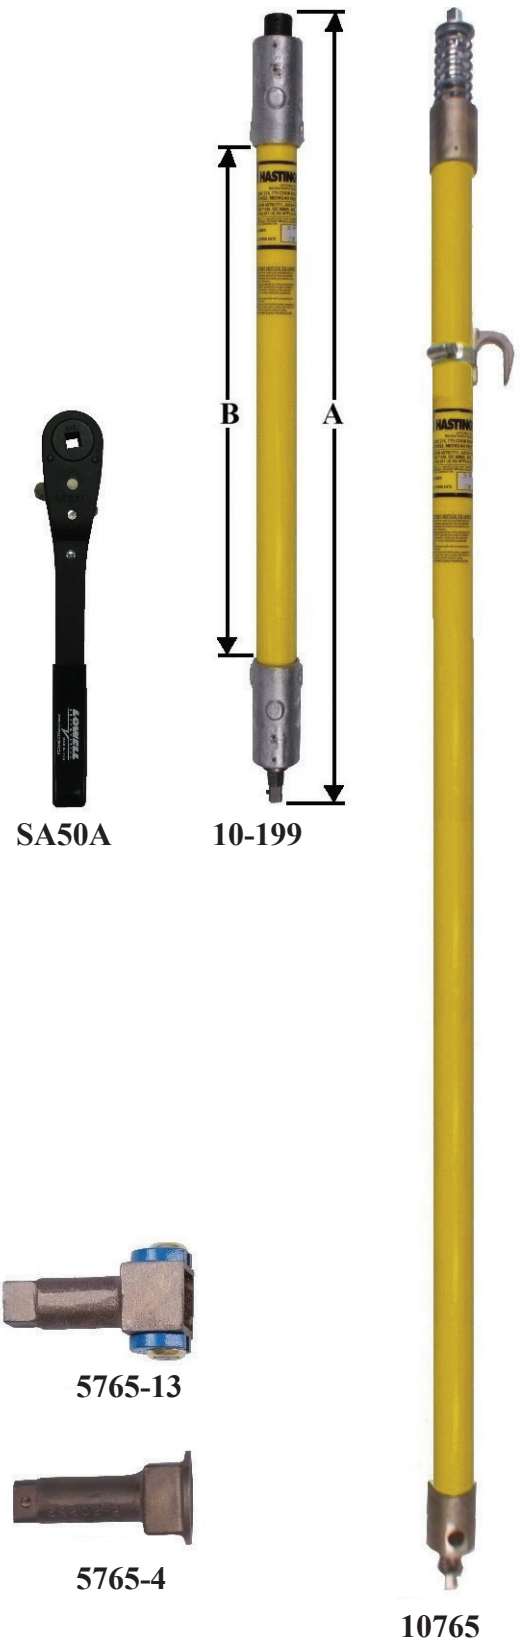

**MAGNETIC WRENCH SOCKET**

- Magnet holds washer/nut in place for replacement on insulator pin

CAT NO	FOR	LBS
5765-13	5/8" SQUARE NUT	1.4
5765-19	3/4" SQUARE NUT	0.8

**4 POINT WRENCH SOCKETS**

- Deep well single square wrench sockets are 3 1/4" long
- Bronze alloy
- For line hardware square bolts and nuts 1/2" square drive

CAT NO	BOLT SIZE	FLATS WIDTH	LBS
5765-4	5/8"	1 1/8"	0.5
5765-6	3/4"	1 9/32"	0.7