


TEMPORARY CROSS ARM

- The Temporary Cross Arm is an excellent tool for changing cross arms. Solid fiberglass arms for maximum strength. Rated for 34.5KV phase to phase.
- Two piece assembly makes installation easy and fast
- The mounting base includes a ratchet and strap assembly for lightweight and safety. U-Shape design fits over pole top pin.
- Fiberglass arm includes two standard conductor holders A10002 with insulators and will accept conductors up to 1 1/16" O.D. Conductor latches are hot stick operable.
- Also available A10039 Large Conductor Holder - 2 5/8" opening
- Captive bolts and washers on arm assembly enable the arm to be mounted to the base. No tools are required.
- Load limit is 150 pounds per side



CAT NO	DESCRIPTION	LBS
5051	72" WIDE, TWO A10002 STANDARD CONDUCTOR HOLDERS, COMPLETE WITH MOUNTING BASE	27.0
5053	72" WIDE, TWO A10039 CONDUCTOR HOLDERS, COMPLETE WITH MOUNTING BASE	28.0
5054	81" WIDE, THREE A10002 STANDARD CONDUCTOR HOLDERS, COMPLETE WITH MOUNTING BASE	33.0
5055	81" WIDE, THREE A10039 CONDUCTOR HOLDERS, COMPLETE WITH MOUNTING BASE	34.0
A30220	ARM ONLY 72"	22.0
A30233	ARM ONLY 81"	26.0
A30221	BI-ARM MOUNTING ASSEMBLY	14.0
A10002	STANDARD CONDUCTOR HOLDER WITH INSULATOR	3.0
A10039	LARGE CONDUCTOR HOLDER, 2 5/8" OPENING, WITH A30008 INSULATOR	3.8
5049	REPLACEMENT STRAP	1.0

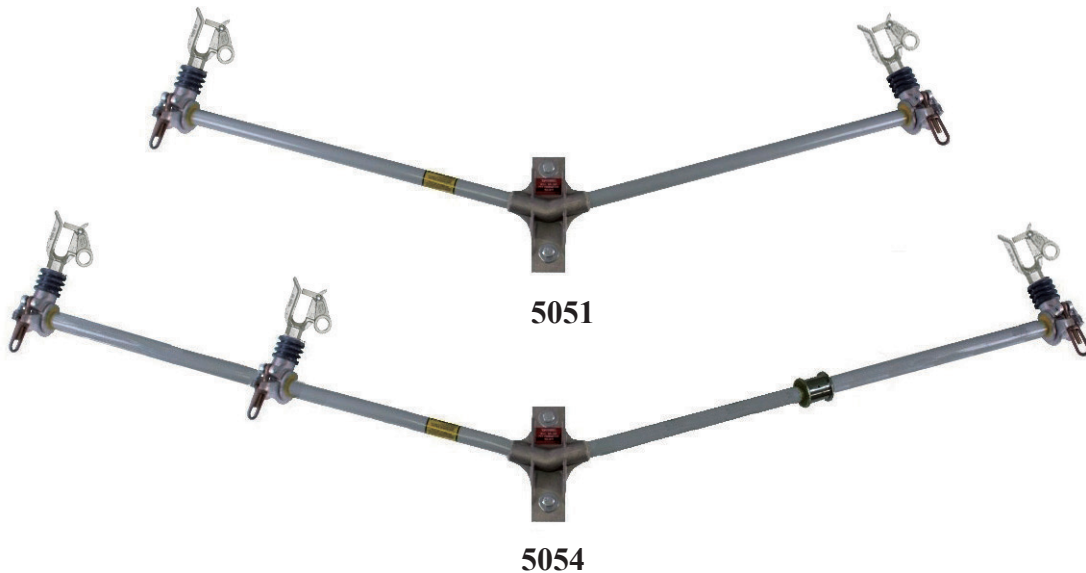