

GROUNDING CABLE FERRULES

FERRULE FOR BOLTED TYPE TERMINALS		
CAT NO	SIZE AWG	LBS
11656	#2	0.1
11657	1/0	0.1
11658	2/0	0.1
11660	4/0	0.1

FERRULE FOR THREADED TYPE TERMINALS, 5/8-11 NC		
CAT NO	SIZE AWG	LBS
12998	#2	0.3
12999	1/0	0.3
13000	2/0	0.3
13001	4/0	0.4

FERRULE FOR COMPRESSION-BOLTED TYPE TERMINALS		
CAT NO	SIZE AWG	LBS
P30244	#2	0.3
P30245	1/0	0.4
P30246	2/0	0.4
P30247	4/0	0.5

FERRULE FOR ELBOWS - URD		
CAT NO	SIZE AWG	LBS
P30916	1/0	0.4
P30917	2/0	0.5

HEAT SHRINK		
CAT NO	DESCRIPTION	LBS
P50349	5" LONG HEAT SHRINK	0.1

FERRULES WITH FACTORY APPLIED CLEAR HEAT SHRINK

- Provides positive stress relief of grounding cables at their terminations
- Clear heat shrink allows visual inspection of cable strands and termination
- Heat shrink materials provides a barrier to resist moisture and corrosion at the termination

FACTORY INSTALLED FERRULES - COMPRESSION BOLTED TYPE		
CAT NO	SIZE AWG	LBS
6756	#2	1.0
6757	1/0	1.0
6758	2/0	1.0
6759	4/0	1.0



6758

FACTORY INSTALLED FERRULES - COMPRESSION 5/8-11 NC THREADED TYPE		
CAT NO	SIZE AWG	LBS
6760	#2	1.0
6761	1/0	1.0
6762	2/0	1.0
6763	4/0	1.0




6762

All HASTINGS ferrules are tin plated copper

- Provides added protection against corrosion



11658

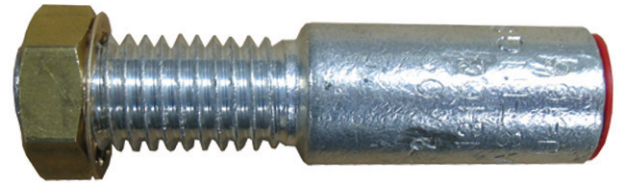

12998



P30246



P30916