

INSULATED JUMPER CABLE - 15KV, 25KV, 35KV

- 15KV Jumper cable available in four sizes
- Conductive strand shield improves service life, dielectric strength and eliminates internal corona
- Insulation is mold cured from ethylene propylene rubber (EPR) and resists abrasion, heat, moisture, and ultra violet rays
- Flexible at low temperatures
- Copper stranding is extra flexible and alloy coated
- Note: These cables are not intended for use as permanently installed or portable power cable. To avoid possible cable damage and high leakage currents, these cables must be positioned away from grounded surfaces or energized conductors other than those to which they are connected.

	CAT NO	SIZE AWG	STRANDING	RATING AMPS	WEIGHT PER 1,000 FT
15KV	12198	#2	259	200	440 LBS
	12199	1/0	427	250	600 LBS
	12200	2/0	427	300	710 LBS
	12201	4/0	532	400	1,050 LBS
25KV	6874	2/0	427	300	903 LBS
35KV	6859	1/0	427	250	1,130 LBS




12200

JUMPER CABLE FERRULE ASSEMBLES
WITH 5/8-11 NC THREADS

- Tin plated copper
- Ferrule has flat side for use with jumper head

CAT NO	CABLE SIZE	LBS
13100	#2	0.3
13101	1/0	0.3
13102	2/0	0.3
13103	4/0	0.4

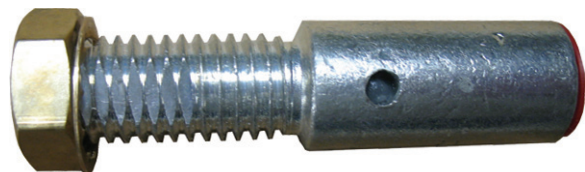

13102